

SATAKE

Optical sorting solutions.

FMSR-IR

Full Color RGB + Shape + Infrared Optical Sorter

The **FMSR-IR** is an efficient midsize sorter that features Full Color RGB + Shape + Infrared technology. It is ideal for sorting products such as dry beans, corn, nuts, coffee, seeds, plastics and multiple varieties of grain as well. The FMSR-IR features patent-pending Satake software assuring quick set-up and hassle-free operation. Behind every optical sorter is the assurance of Satake's premiere after the sales support and customer service.



MODEL
FMSR-IR (3 chutes)



The Satake FMSR-IR mid-size optical sorter features Full Color RGB + Shape + Infrared technology and a user- friendly, intelligent software interface.

Typical Product Applications



Corn



Dry Beans



Coffee



Soybeans



Wheat



Plastics

Features and Benefits


The **Satake FMSR-IR** optical sorter is ideal for medium to-high capacity processing lines. The FMSR-IR features Full Color RGB + Shape + Infrared technology.

- » Full color high resolution RGB camera technology (0.14 mm/pixel)
- » Infrared Cameras are standard
- » Size and Shape Sorting
- » Precision 5mm air ejectors
- » Stainless Steel removable Accept/Reject Hoppers for easy cleaning and increased sanitation
- » Real time accept and reject sampling
- » Satake 3S Smart Sensitivity Software
- » Automatic accept and defect profile creation
- » Advanced touch screen user interface
- » No downtime for calibration
- » 240mm wide chutes with vibratory feeder system


Specifications

		FMSR03-IR
Sorting Width	240mm x 3 = 720mm	
Camera	RGB Full Color Cameras and NIR Cameras	
Light Source	RGB	CCFL
	NIR	LED
Air Ejector Count	144	
Power Supply	Single Phase, AC200-240V	
Required Air Volume (100L/min. ejector)	60CFM 1700L/min.	
Dust Collector	1200CFM 34m3/min.	
Required Power	1.8kW	
Operation Screen	Full Color Touch Screen	
Dimension	50.1in.(W) x 73.5in.(L) x 75.0in.(H) 1273mm(W) x 1867mm(L) x 1905mm(H)	
Net Weight	900lb 405kg	
Standard Operating Environmental Conditions	Temperature: 32-104degF (0-40degC) Humidity: 85% or less (non-condensing)	
Noise Level	86dB	

Dimensions

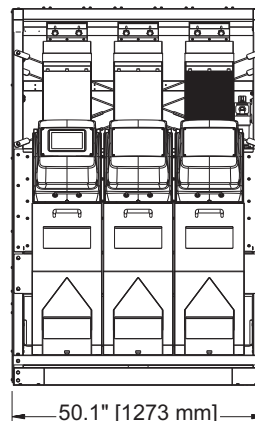

50.1" [1273 mm]

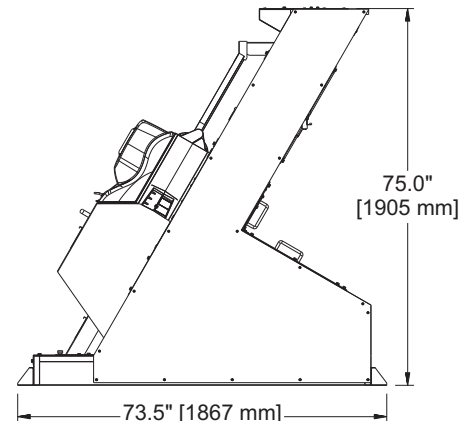

73.5" [1867 mm]

75.0" [1905 mm]

Satake is a global provider of optical sorting solutions. If you are interested in a free demonstration using your product, or if you need more information, contact us at vision@satake-usa.com.

NORTH, CENTRAL, SOUTH AMERICA
Satake USA Inc. (Corporate office)
10900 Cash Road
Stafford, Texas 77477 USA
Tel 281.276.3600

WEST COAST USA
Satake USA Inc.
1055 Reno Ave
Modesto, California 95351 USA
Tel. 209.551.3203

